



The Power Cord Manufacturer
www.stayonline.com

Hubbell Non-NEMA Twist-Lock® Devices 20A, 250V/10A, 600V AC, 4 Pole, 5 Wire Grounding Insulgrip® Plug

Features

- Ribbed nylon housing provides a secure grip and impact and chemical resistance.
- Superior cord grip design protects terminations from excess strain.
- Clear, funnel shaped wire entry for ease of termination.
- Integral dust shield protects wiring chamber from dust or contaminants.

Ordering Information

Description	Cord Diameter	Hubbell Number
Black and white nylon.	.350" - 1.150" (9 - 29 mm)	HBL3521C

Stay Online Item # 4039

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications

Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Blades	Brass
Terminal Screws	#10-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - nickel plated

Performance

Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielect Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

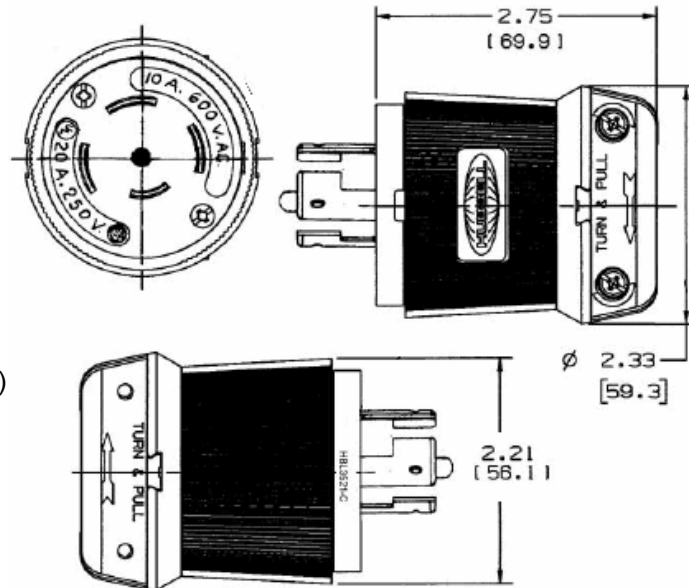

Complementary Products

Connector	HBL3523C
Single Receptacle	HBL3520
Flanged Receptacle	HBL3525C
Weatherproof Boot	HBL6035